



**10TL M / 15TL M / 20TL M / 30TL M**

**THREE-PHASE HYBRID INVERTER WITH TWO OR THREE PV MPPTs**

**THE BEST SOLUTION FOR RESIDENTIAL OR COMMERCIAL SOLAR+STORAGE SYSTEMS**

The INGECON® SUN STORAGE 3Play TL M hybrid inverter makes it possible to combine photovoltaic generation and energy storage with no need for any additional PV inverters.

**Two or three MPPT system**

This inverter features with two or three maximum power point tracking (MPPT) system, that allows it to draw the maximum power from the PV array, including roof-mounted installations with different orientations or with partial shading.

**Three phase unbalance function**

This inverter has support for unbalanced three-phase consumption on both grid side and backup side.

**EMS Inside**

The inverter is equipped as standard with an energy management system (EMS). The EMS permits more advanced functionalities, such as self-consumption or peak-shaving. Thanks to the built-in EMS, the installation can be monitored at all times via a PC or mobile phone with the free INGECON® SUN Monitor application, available at Play Store and App Store.

**Start-up and monitoring**

Fast and easy start-up and display of data and graphics through the integrated user interface. Furthermore, users can easily upgrade the inverter firmware from the application, through a PC, tablet or mobile.

**5 year warranty, extendible up to 10 years.**

## 10TL M / 15TL M / 20TL M / 30TL M

### The best solution for residential or commercial solar+storage systems

#### OPERATING MODES:

##### - Self-consumption mode

This operating mode is directed at grid connection systems with renewable energy sources, in order to minimise grid unbalance three-phase consumption. If the energy generated is greater than demand, then any surplus energy could either be used to charge the batteries or to be injected into the grid. In addition, it features a back-up and a peak shaving functionality. Also, the user can programme the charge / discharge times of the batteries.


##### - Stand-alone mode

The INGECON® SUN STORAGE 3Play TL M inverter generates a stand-alone AC grid and acts as a grid manager, guaranteeing the correct balance between PV generation, unbalance three-phase consumption and the storage system. It is equipped with a relay for the neutral-to-earth connection of the system loads in order to create a TT stand-alone network. Moreover, the inverter permits the connection of an auxiliary generator, which can be started-up through a potential-free output for charging the batteries.

#### Protections

- AC overvoltages.
- Insulation faults.
- Short-circuits and overloads at the output.
- DC breaker for the PV array.
- Anti-islanding with automatic disconnection.
- Surge Arrester: Type II for 10TL M, Type III for 15-30TL M.
- AFCI with automatic disconnection.
- PV input reverse polarity protection.
- Battery input reverse polarity protection.


#### Stand-alone diagram

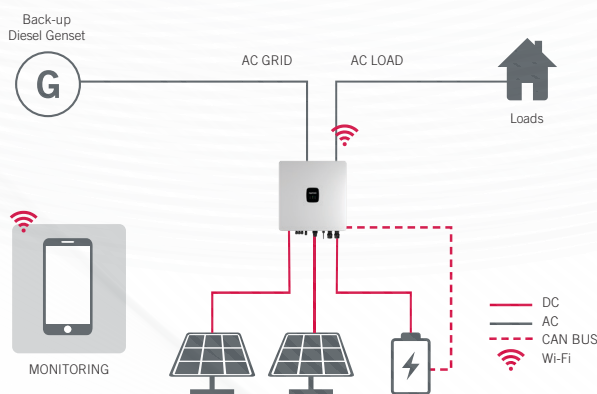


#### Features

- Two or three MPPT system up to 150-200% PV input.
- RS-485 and Ethernet communication for the wattmeter.
- Wi-Fi and Ethernet communication.
- CAN Bus 2.0 communication for the BMS (Battery Management System).
- 2 configurable digital inputs.
- 2 configurable potential free outputs.
- Pre-charging system at the battery input.
- Relay for the neutral to earth connection for critical loads in type TT / TN-S / TN-C-S installations.
- Rapid start-up and view of the installation thanks to the INGECON® SUN Monitor user interface.
- Possibility of operating just from the PV array and of adding the storage system at a later date.
- Suitable for indoor and outdoor installations (IP65).
- Back-up functionality available for self-consumption installations.
- Peak shaving functionality.
- Configuration of the battery charge / discharge times.
- Modbus TCP / Wi-Fi communication with EV chargers.
- DRMO included (for the Australian market).
- Three phase unbalance function.

#### Self-consumption diagram

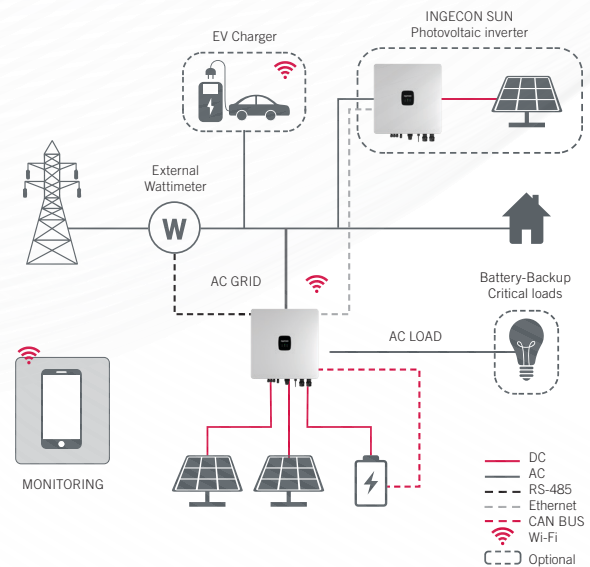

#### Size and weight (mm)



BATTERY INPUT (DC)	10TL M	15TL M	20TL M	30TL M
Voltage range <sup>(1)</sup>	120 - 600 V	120 - 800 V	120 - 800 V	120 - 800 V
Nominal battery voltage	250 - 600 V	285 - 800 V	380 - 800 V	230 - 800 V
Maximum charge / discharge current	50 / 50 A	60 / 60 A		2*75 / 2*75 A
Maximum charge / discharge power	15,000 / 11,300 W	30,000 / 15,000 W	30,000 / 20,000 W	45,000 / 30,000 W
Maximum voltage	600 V	800 V	800 V	800 V
Type of battery <sup>(2)</sup>	Ion-lithium (LG, BYD, Pylontech...)			
Communication with ion-lithium batteries	CAN Bus 2.0			
Battery connection way	Dedicated DC connector			

**PV INPUT (DC)**

PV array maximum power	15,000 W	30,000 W	30,000 W	45,000 W
MPPT Voltage range	160 - 950 V			
Maximum input voltage <sup>(3)</sup>	1,000 V			
Maximum current per MPPT (input 1 / input 2 / input 3)	20 / 30 A	32 / 32 A	32 / 32 A	32 / 32 / 32 A
Maximum short circuit current (input 1 / input 2 / input 3)	30 / 40 A	40 / 40 A	40 / 40 A	40 / 40 / 40 A
Number of MPP trackers	2	2	2	3
Number of inputs per MPP	1 / 2	2 / 2	2 / 2	2 / 2 / 2
Full power MPP voltage	370-800 V	260-800 V	350-800 V	350-800 V
PV connection way	MC4 / H4			

**GRID / GENSET (AC)**

Rated voltage	380 / 400 / 415 V, 3N~+PE			
Voltage range	260 - 520 V (Adjustable)			
Nominal Frequency	50 / 60 Hz			
Network type	TT / TN-C / TN-C-S / TN-S			
Rated power	10 kW	15 kW	20 kW	30 kW
Max. Temperature for rated power	45°C			
% of rate power @ 50°C	80 %			
Nominal current	3*15.2A	3*22.8A	3*30.4A	3*45.6A
Power Factor	>0.99 Rated power (Adjustable 0.8 LG-0.8 LD)			
Adjustable Power Factor	YES			
THD	<5%	<3%	<3%	<3%
AC connector type	OT Terminal			

**CRITICAL LOAD (BACKUP AC)**

Rated voltage	380 / 400 / 415 V, 3N~+PE			
Nominal Frequency	50 / 60 Hz			
Rated power	10 kW	15 kW	20 kW	30 kW
Nominal current	3*15.2A	3*22.8A	3*30.4A	3*45.6A
THDV	<3% (R Load), 8% (RCD Load)			
AC connector type	OT Terminal			
Overload capacity	≥1.1*Pn ~ <1.2*Pn (5min) ≥1.2*Pn ~ <1.5*Pn (10s) ≥1.5*Pn (200ms)			

**FEATURES**

Back-up function response time	12 ms			
Max. Efficiency (PV to grid)	≥ 97.5 %	≥ 97.5 %	≥ 97.5 %	≥ 97.6 %
European Efficiency (PV to grid)	≥ 97.1 %	≥ 97.1 %	≥ 97.1 %	≥ 97.1 %
Max. Charge Efficiency (PV to battery)	≥ 98.0 %	≥ 98.0 %	≥ 98.0 %	≥ 98.5 %
Max. Discharge Efficiency (Battery to grid)	≥ 97.1 %	≥ 97.1 %	≥ 97.1 %	≥ 97.4 %
Max. Charge Efficiency (Grid to battery)	≥ 96.7 %	≥ 96.7 %	≥ 96.7 %	≥ 96.7 %

**Notes**

<sup>(1)</sup> The maximum power supplied by the battery shall be the battery voltage multiplied by the maximum discharge current.

<sup>(2)</sup> Consult the Ingeteam website for a list of compatible batteries.

<sup>(3)</sup> Never exceed. Consider the voltage increase of the panels 'Voc' at low temperatures.

## GENERAL INFORMATION

Anti-corrosion	C4H protection class			
Refrigeration system	Natural ventilation	Natural ventilation	Natural ventilation	Forced ventilation
Stand-by consumption	<20 W			
Consumption at night	<10 W			
Ambient temperature	-25 °C to 60 °C			
Relative humidity (non condensing)	0 - 100%			
Protection class	IP65	IP66	IP66	IP66
Marking	CE			
Acoustic emissions	<30 dB	<35 dB	<35 dB	<60 dB
Max. altitude - Max. altitude without derating	4,000 m - 2,000 m			
EMC and security standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, AS3100			
Grid connection standards	IEC 61727; IEC 62116; EN 50549-1; UNE 217002; UNE 217001; NTS SEPE 2.1 typeA; CEI 0-21 V1 November 2022 (Including Allegato A+ Allegato B+, Allegato BBis); VDE-AR-N 4105:2018.			

## Notes

- <sup>(1)</sup> The maximum power supplied by the battery shall be the battery voltage multiplied by the maximum discharge current.  
<sup>(2)</sup> Consult the Ingeteam website for a list of compatible batteries.  
<sup>(3)</sup> Never exceed. Consider the voltage increase of the panels 'Voc' at low temperatures.



## EUROPE

**Ingeteam Power Technology, S.A.**  
Avda. Ciudad de la Innovación, 13  
31621 Sarriguren (Navarra) - Spain  
Tel.: +34 948 288 000  
Fax: +34 948 288 001  
e-mail: solar.energy@ingetteam.com  
bess.energy@ingetteam.com

**Ingeteam S.A.**  
Parque Tecnológico de Bizkaia  
Edificio 106  
48170, Zamudio (Bizkaia) – Spain  
Tel.: +34 944 039 710

**Ingeteam S.r.l.**  
Via Emilia Ponente, 232  
48014 Castel Bolognese (RA) - Italy  
Tel.: +39 0546 651 490  
Fax: +39 054 665 5391  
e-mail: italia.energy@ingetteam.com

**Ingeteam SAS**  
140 Rue Carmin - Le Naurouze B  
31670 Labège - France  
Tel.: +33 (0)5 61 25 00 00  
Fax: +33 (0)5 61 25 00 11  
e-mail: france@ingetteam.com

**Ingeteam, a.s.**  
Technologická 371/1  
70800 Ostrava - Pustkovec  
Czech Republic  
Tel.: +420 597 476 820  
Fax: +420 59 732 6899  
e-mail: czech@ingetteam.com

**Ingeteam GmbH**  
Grand Bateau – Zollhof 6  
D-40221 – Düsseldorf, Germany  
Tel.: +49 (0) 211 78177950  
e-mail: deutschland@ingetteam.com

**Ingeteam Poland Spzoo**  
Ul. Koszykowa 60/62 m 39  
00-673, Warsaw, Poland  
Tel.: (+48) 22 821 99 30  
e-mail: polska@ingetteam.com

**Ingeteam LTD.**  
1st Floor, Midas House, 62 Goldsworth Road,  
Woking, Surrey GU21 6LQ - United Kingdom  
Tel.: +44 (0) 141 488 5290

## NORTH AMERICA

**Ingeteam Inc.**  
3550 W. Canal St.  
Milwaukee, WI 53208 - USA  
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190  
Fax: +1 (414) 342 0736  
e-mail: usa@ingetteam.com

**Ingeteam Power Technology S de RL de CV**  
Av. Ejercito Nacional Mexicano 351, Chapultepec  
Morales, Granada, Manuel Hidalgo  
CP: 11520  
Ciudad de México, México  
Tel.: (+52) 55 3000 1750  
e-mail: proveedores.iptm@ingetteam.com

## SOUTH AMERICA

**Ingeteam Ltda.**  
Rua Estácio de Sá, 560  
Santa Genebra  
Campinas - SP  
CEP: 13080-010; São Paulo - Brazil  
Tel.: (+55) 19 30 37 37 73  
e-mail: brazil@ingetteam.com

**Ingeteam Chile SpA**  
Balmoral n.º 309, Piso 10º, Oficina 1008,  
7561282 Las Condes  
Santiago, Chile  
Tel.: (+56) 229 253 825  
e-mail: chile@ingetteam.com

## ASIA

**Ingeteam Power Technology Shanghai, Co. Ltd.**  
Room 2606-F, No.360 South Pudong Road  
China (Shanghai) pilot free trade zone  
C.P 200120  
Tel.: +86 139 1622 4886  
e-mail: liu.yimin@ingetteam.com

**Ingeteam India Pvt. Ltd.**  
Survey No. 111/1-111/3 & 111/5-111/7,  
Village No.155, Mambakkam Village,  
Chennai - Bangalore Main Road,  
Sriperumbudur Taluk,  
Kancheepuram District - 602106,  
Tamilnadu, India

**Ingeteam Power Technology S.A. UAE Branch**  
Al Bateen tower c6 Bainunah 1st floor  
Street 34  
Abu Dhabi - UAE  
Tel.: +971 2 207 6666

**Ingeteam Power Technology S.A.**  
Thailand representative office  
100/67 Vongvanij B Building, 22nd floor,  
Rama IX Road., HuayKwang,  
10320 Bangkok  
Te.: +66 22461798  
e-mail: Thailand.pga@ingetteam.com

**Ingeteam Vietnam CO., LTD**  
Spaces Building, 28A Tran Hung Dao Street,  
Phan Chu Trinh Ward Hoan Kiem District,  
Hanoi City, Vietnam

## AUSTRALIA

**Ingeteam Australia Pty Ltd.**  
Iaccelerate Centre, Building 239  
Innovation Campus, Squires Way  
North Wollongong, NSW 2500 - Australia  
Tel.: +61 429 111 190  
e-mail: australia@ingetteam.com

# Ingeteam

[www.ingetteam.com](http://www.ingetteam.com)