


Converter Voltage

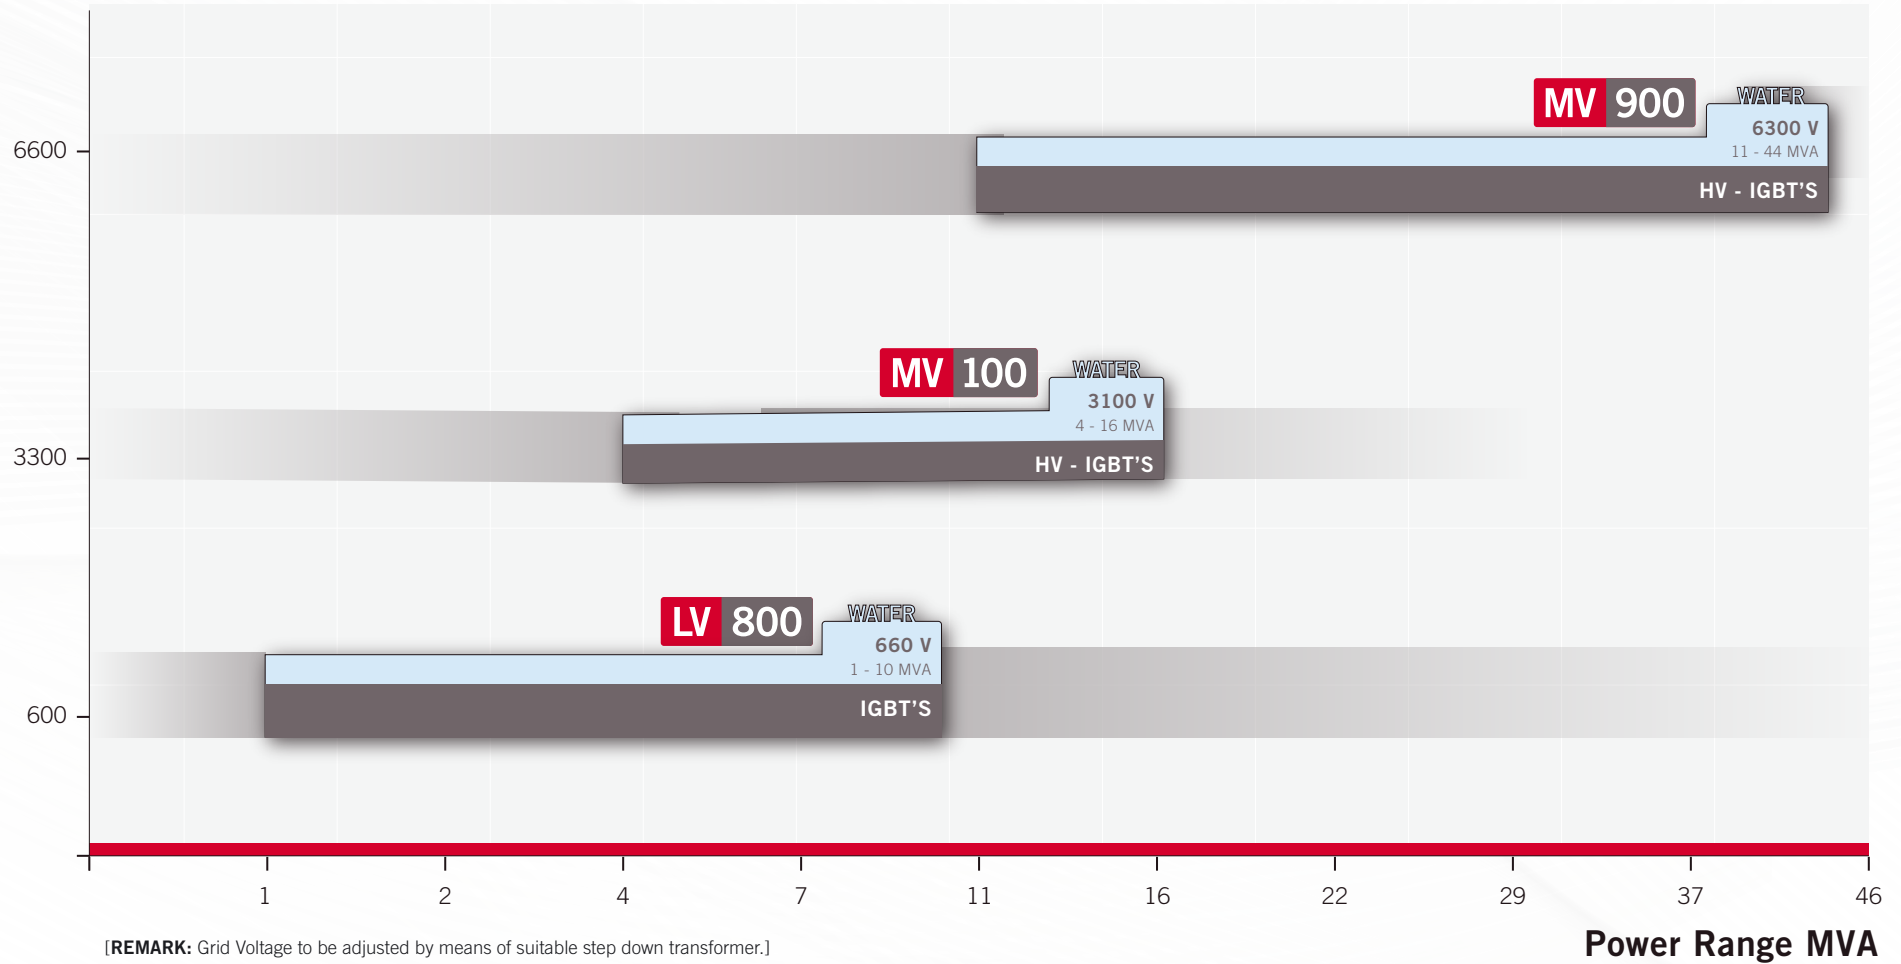

Low Voltage solution

2.5 MVA power steps up to 10 MVA

Containerized Up to 10MVA

Low voltage (660 V) water-cooled converter with active front end rectifier inside a 20 feet HC ISO container, and equipped with LC filter and sinusoidal filter output.

INGEGRID LV 800



INGEGRID SC



Medium Voltage solution

4 MVA power steps up to 16 MVA

Containerized up to 16MVA

Medium voltage (3.1 kV) water-cooled converter with active front end rectifier inside a 20 feet HC ISO container, and equipped with LC filter and sinusoidal filter output.

INGEGRID MV 100



INGEGRID SC

