

## MULTI-MPPT STRING INVERTER WITH THE MAXIMUM POWER DENSITY

### INGECON® SUN 350TL M12

#### Greater cost-effectiveness

Thanks to its greater output power, the new INGECON® SUN 350TL M12 allows to drastically reduce the number of inverters required for designing a PV power plant. Thus, it minimises the labour cost and reduces the global cabling cost.

Moreover, it does not require DC combiner boxes, ensuring the minimum possible CAPEX (Capital Expenditures). Furthermore, its string inverter philosophy permits an easy and immediate replacement that does not require qualified technicians.

#### Higher flexibility and power density

The highest flexibility thanks to its maximum DC voltage (1,500 V) and to its wide voltage range MPP (850-1,300 V). Awesome power density, with up to 350 kW.

#### Long-lasting and rugged design

Aluminium casing, especially conceived for indoor and outdoor applications (IP66). The INGECON® SUN 350TL M12 inverters have been designed to guarantee a long life expectancy and to withstand extreme temperatures.

#### Wi-Fi communication as standard

The inverter features Wi-Fi communication as standard. This Wi-Fi interface is used to commission the inverter through the INGECON® SUN Monitor App, available for iOS and Android. A wizard guides the user through the entire start-up process.

#### SPE (Single Pair Ethernet)

The inverter features SPE communication as standard. Using SPE, the communication with the inverters can be established up to 1,000 meters. Moreover, these inverters enables daisy chain connection. Thus, several inverters can be connected to the same SPE line. The versatility and possibilities offered by the SPE are an important improvement at the plant's communication network.

#### Grid support

The INGECON® SUN 350TL M12 has been designed to comply with the grid connection requirements in different countries, contributing to the quality and stability of the electric system. These inverters therefore feature a low voltage ride-through capability, and can deliver reactive power and control the active power delivered to the grid.

#### Remote monitoring

The inverter can be monitored with the [www.ingeconsunmonitor.com](http://www.ingeconsunmonitor.com) website or with the INGECON® SUN Monitor App.



## INGECON® SUN 350TL M12

### Fully equipped

In order to achieve the maximum performance with the maximum cost-effectiveness, the INGECON® SUN 350TL M12 inverter is supplied totally equipped with all the electrical protections.

### Integrated components

Photovoltaic connectors	✓
DC switch (3 units)	✓
DC surge arresters, type II	✓
AC surge arresters, type II	✓
Strings current metering kit	✓
Wi-Fi communication	✓
SPE (Single Pair Ethernet) communication	✓

#### MAIN FEATURES


- 12 MPPTs.
- 2 strings per MPPT.
- PID recovery.
- Reactive power capability.
- Reactive power injection at night.
- Low-voltage ride-through capability.
- 99.05% maximum efficiency.
- Single Pair Ethernet and Wi-Fi communications.
- Integrated Webserver.
- Software INGECON® SUN Monitor for PV plant monitoring.
- Suitable for indoor and outdoor installations (IP66).
- High temperature performance.
- One digital input and one digital output.
- Anti-corrosion with C5 protection class.

#### PROTECTIONS

- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.
- AC overvoltages with type II surge arresters.
- DC overvoltages with type II surge arresters.

#### BENEFITS


- Greater power density.
- Greater cost-effectiveness thanks to the cabling cost reduction.
- High availability compared to central inverters.
- High efficiency rates.
- Easy maintenance.

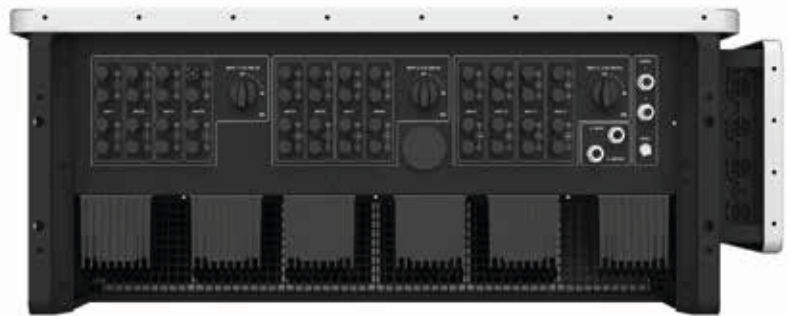


<b>350TL M12</b>	
<b>800 V</b>	
<b>Input (DC)</b>	
Operating voltage range	700 - 1,500 V
MPP voltage range	850 - 1,300 V
Maximum voltage	1,500 V
Maximum current per input	22.5 A
Number of inputs per MPPT	2
Number of MPPTs	12
<b>Output (AC)</b>	
Rated power	346 kVA
Maximum current	250 A
Ambient temperature for rated power	37 °C
Rated voltage	3 / PE, 800 V
Frequency	50 / 60 Hz
Type of grid	IT
Power factor adjustable <sup>(1)</sup>	Yes, 0 - 1 (leading / lagging)
THD (Total Harmonic Distortion) <sup>(2)</sup>	<3%
<b>Efficiency</b>	
Maximum efficiency	99.05%
Euroefficiency	98.60%
<b>General information</b>	
Cooling system	Forced ventilation
Air flow	900 m <sup>3</sup> /h
Stand-by consumption	25 W
Operation temperature	-30 °C to 60 °C
Relative humidity (non-condensing)	0 - 100%
Protection class	IP66 / NEMA 4
Residual current monitoring unit	Yes
Maximum operating altitude	4,000 m.a.s.l. (for installations beyond 1,000 m.a.s.l., please contact Ingeteam's solar sales department)
Connection	AC connection: max. cross section: 400 mm <sup>2</sup> (one cable) DC connection: 6 mm <sup>2</sup> MC4-Evo <sup>2</sup> (10 mm <sup>2</sup> optional)
Marking	CE
EMC and safety standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, IEC60068-2-1:2007, IEC60068-2-2:20007, IEC60068-2-14:2009, IEC60068-2-30:2005, IEC62116, IEC61683 y EN50530
Grid connection standards	DIN V VDE V 0126-1-1, EN 50439, EN 50549, CEI 0-21, CEI 0-16 VDE-AR-N 4105:2011-08, P.O.12.3, BDEW, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, Brazilian Grid Code, South African Grid Code, Chilean Grid Code, DEWA 2.0, Jordanian Grid Code, G99, VDE-AR-4110, NTS de REE, Directive EU 2016/631

**Notes:** <sup>(1)</sup> Extended adjustment range for nominal working points (2) For rated AC power and voltage in accordance with IEC 61000-3-4.


**Efficiency INGECON® SUN 350TL M12**

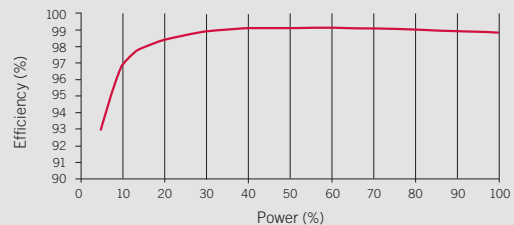

**Size and weight (mm)**



**350TL M12**  
150 kg.

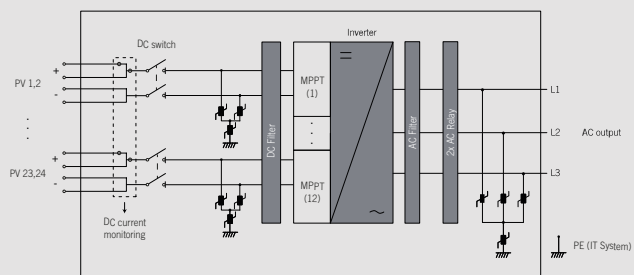

## EUROPE

**Ingeteam Power Technology, S.A.**  
Avda. Ciudad de la Innovación, 13  
31621 Sarriguren (Navarra) - Spain  
Tel.: +34 948 288 000  
Fax: +34 948 288 001  
e-mail: [evc.energy@ingeteam.com](mailto:evc.energy@ingeteam.com)

**Ingeteam S.r.l.**  
Via Emilia Ponente, 232  
48014 Castel Bolognese (RA) - Italy  
Tel.: +39 0546 651 490  
Fax: +39 054 665 5391  
e-mail: [emobility.italia@ingeteam.com](mailto:emobility.italia@ingeteam.com)

**Ingeteam SAS**  
140 Rue Carmin - Le Naurouze B  
31670 Labège - France  
Tel.: +33 (0)5 61 25 00 00  
Fax: +33 (0)5 61 25 00 11  
e-mail: [france@ingeteam.com](mailto:france@ingeteam.com)

**Ingeteam, a.s.**  
Technologická 371/1  
70800 Ostrava - Pustkovec  
Czech Republic  
Tel.: +420 59 747 6800  
Fax: +420 59 732 6899  
e-mail: [czech@ingeteam.com](mailto:czech@ingeteam.com)

**Ingeteam GmbH**  
Grand Bateau – Zollhof 6  
D-40221 – Düsseldorf, Germany  
Tel.: +49 (0) 211 78177950  
e-mail: [deutschland@ingeteam.com](mailto:deutschland@ingeteam.com)

**Ingeteam Poland Spzoo**  
Ul. Koszykowa 60/62 m 39  
00-673, Warsaw, Poland  
Tel.: (+48) 22 821 99 30  
e-mail: [polska@ingeteam.com](mailto:polska@ingeteam.com)

**Ingeteam LTD.**  
Unit 10 Gordano 19, Garanor Way, Portbury  
Bristol, BS20 TXE - United Kingdom  
Tel.: +44 (0) 331 630 0305

## NORTH AMERICA

**Ingeteam Inc.**  
3550 W. Canal St.  
Milwaukee, WI 53208 - USA  
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190  
Fax: +1 (414) 342 0736  
e-mail: [usa@ingeteam.com](mailto:usa@ingeteam.com)

**Ingeteam Power Technology México S de RL de CV**  
Av. Ejército Nacional Mexicano 351,  
Chapultepec Morales, Granada,  
Miguel Hidalgo,  
CP: 11520  
Ciudad de México, CDMX  
Tel.: (+52) 55 6586 9930  
e-mail: [proveedores.iptrm@ingeteam.com](mailto:proveedores.iptrm@ingeteam.com)

## SOUTH AMERICA

**Ingeteam Ltda.**  
Rua Estácio de Sá, 560  
Santa Genebra  
Campinas - SP  
CEP: 13080-010; São Paulo - Brazil  
Tel.: (+55) 19 30 37 37 73  
e-mail: [brazil@ingeteam.com](mailto:brazil@ingeteam.com)

**Ingeteam Chile SpA**  
Balmoral n.º 309, Piso 10º, Oficina 1008,  
7561282 Las Condes  
Santiago, Chile  
Tel.: (+56) 229 253 825  
e-mail: [chile@ingeteam.com](mailto:chile@ingeteam.com)

## ASIA

**Ingeteam Power Technology Shanghai, Co. Ltd.**  
Room 2606-F, No.360 South Pudong Road  
China (Shanghai) pilot free trade zone  
C.P 200120  
Tel.: +86 139 1622 4886  
e-mail: [liu.yimin@ingeteam.com](mailto:liu.yimin@ingeteam.com)

**Ingeteam India Pvt. Ltd.**  
Survey No. 111/1-111/3 & 111/5-111/7,  
Village No.155, Mambakkam Village,  
Chennai - Bangalore Main Road,  
Sriperumbudur Taluk,  
Kancheepuram District - 602106,  
Tamilnadu, India

**Ingeteam Power Technology S.A. UAE Branch**  
Al Bateen tower c6 Bainunah 1st floor  
Street 34  
Abu Dhabi - UAE  
Tel.: +971 2 207 6666

**Ingeteam Power Technology S.A.**  
Thailand representative office  
100/67 Vongvanij B Building, 22nd floor,  
Rama IX Road., HuayKwang,  
10320 Bangkok  
Te.: +66 22461798  
e-mail: [Thailand.pga@ingeteam.com](mailto:Thailand.pga@ingeteam.com)

## AUSTRALIA

**Ingeteam Australia Pty Ltd.**  
Iaccelerate Centre, Building 239  
Innovation Campus, Squires Way  
North Wollongong, NSW 2500 - Australia  
Tel.: +61 429 111 190  
e-mail: [australia@ingeteam.com](mailto:australia@ingeteam.com)

# Ingeteam

[www.ingeteam.com](http://www.ingeteam.com)